

S-Line Lashing Strap 5035 with hook guard




**GS- and TÜV
certified**

Accordance with DIN EN 12195-2
with a sewn in label on
the fastened and
loose ends



The safety feature on our double pointed
hooks insure that the lashing strap cannot
detach from its anchoring.

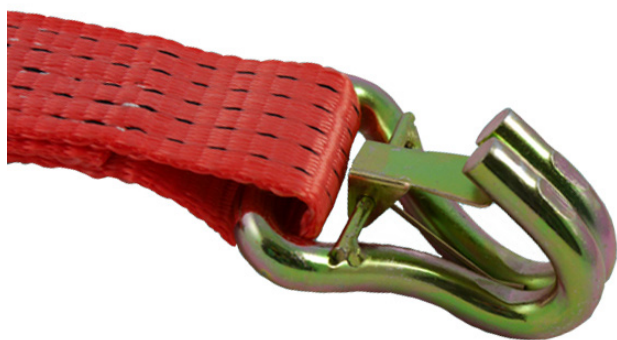

Packaging:
1 piece - 10 piece/box - 240 piece/palett

S-Line Lashing Strap 5035
(**142138699**), two piece, red, with
Ratchet R50E1 and Double Pointed
Safeguard 5005, strap width 50 mm,
elongation <5%, STF 350 daN

Breaking load:
LC 2500 daN when pulled straight
LC 5000 daN in the strapping

Total length: 8000 mm (Fastened end
500 mm, loose end 7500 mm)

Suer Nutzfahrzeugtechnik GmbH & Co. KG
Handelsstr. 5, 42929 Wermelskirchen

Tel.: 02196 946-0, Fax: 02196 946-100
E-Mail: info@suer.de

www.suer.de, www.fahrzeugbau-shop.de

